



Electric instantaneous
water heater

PPH2 hydraulic

Multipoint water heater
at the lowest price

Most important advantages



Power regulation

Allows to set the heater
on full power or economic
mode.



Automatically switches on 2 steps of heating

Automatic "switch on"
system and power
selection according to the
water flow rate.

Dimensions





Supply water pressure 0,25 - 0,6 MPa

Inlet and outlet section 1/2" inner
thread

Safety class IP 25

Application

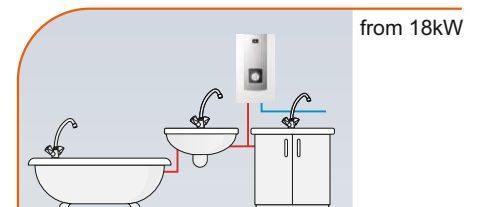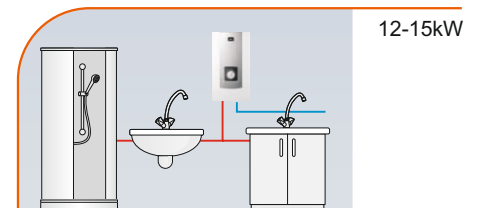

Technical data

Type	Rated power	Rated voltage	Rated current (A)	Min. connecting wires section (mm ²)	Efficiency ($\Delta t=30^{\circ}$) (l/min.)
PPH2-09	9 kW	400V 3~	3x13,0	4 x 1,5	4,3
PPH2-12	12 kW	400V 3~	3x17,3	4 x 2,5	5,8
PPH2-15	15 kW	400V 3~	3x21,7	4 x 2,5	7,2
PPH2-18	18 kW	400V 3~	3x26,0	4 x 4	8,7
PPH2-21	21 kW	400V 3~	3x30,3	4 x 4	10,1

All technical data is based on standards of Central European countries.
However, Kospel S.A. is fully flexible to adjust its appliances to other standards.